

Wenzhou Safewire Electric CO.,Ltd.

# SPECIFICATION SHEET

**PRODUCT NAME:**            Pop up floor socket

**PRODUCT No. :**            HTD-2602



Address:2nd floor, Wealth Garden, Liushi town, Yueqing, Wenzhou,China ,325604

Tel:0086-577-61725369

Mob:0086-18612380398

ZIP:325604

(E-mail) : info@safewirele.com

(WEB): <http://www.safewirele.com>

## Quick Details:

Serial No.	Parameter	Description
1	Safewire item	HTD-2602
2	Surface finish	Wire drawing/Polishing/Spray painting
3	Panel Dimension(mm)	270*147*8.7
4	Cutout(mm)	253*128
5	Capacity of modules	8 ways modules
6	Bracket material	Zinc Alloy & Alu Alloy
7	Sink box Thickness	1.2mm
8	Sink box Material	Steel+Zinc plated
9	Available modules	45*45mm or 45*22.5mm
10	Damping device (DP)	Normal Pop-up & Soft Pop-up available

## Application:



## 1.Feature of Safewire floorbox:

1.3/4/6/8 ways 45\*45mm modules inside




**2.Silver/Black/Brass/White/Nickel etc. colour**



**3.More International Socket,multimedia and Data accessories:BS/EU/UL/Universal/SAA Standard**


1.45\*45mm Modules

45



2.128 Type series

128




## 2. Advantage of Safewire floorbox :

**1.Over 20 years production experience for global brand:**




**2.Easy-Installation & Fast-wiring**

**1. Easy-Installation**

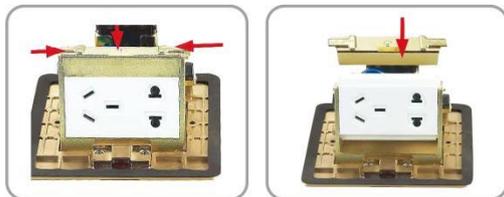

**2. Fast-Wiring**

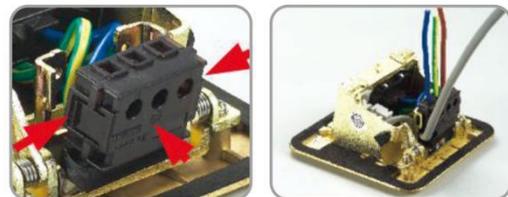

**3.Reliable Quality Certificated by TUV , Germany**



Weight:288g




Thickness:1.35mm



### 3.Specification of Safewire floorbox :

#### A)Product dimension:

HTD-2602/2602L/W/B Units:mm

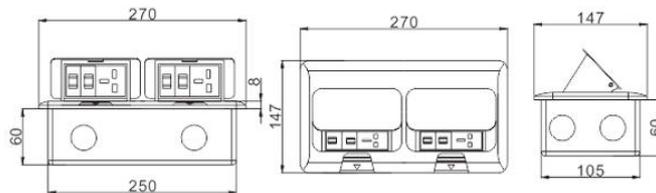


#### B)Available installation modules/socket/accessories:

##### 1. 45\*45mm Modules




##### 2. 128 Modules socket

	23x72mm	Thailand 6 Pin Power socket	white/black		23x72mm	NEMAS-20R 20A 6 Pin Power socket	white/black
CP5-2				CP7-2			
	23x72mm	NEMAS-15R 16A 6 Pin power socket	white/black		23*36mm	RJ11 telephone models	white/black
CP6-2				CD-2-2			

C)Safewire floorbox Application in different floor system:




E)Safewire optional of economical package:

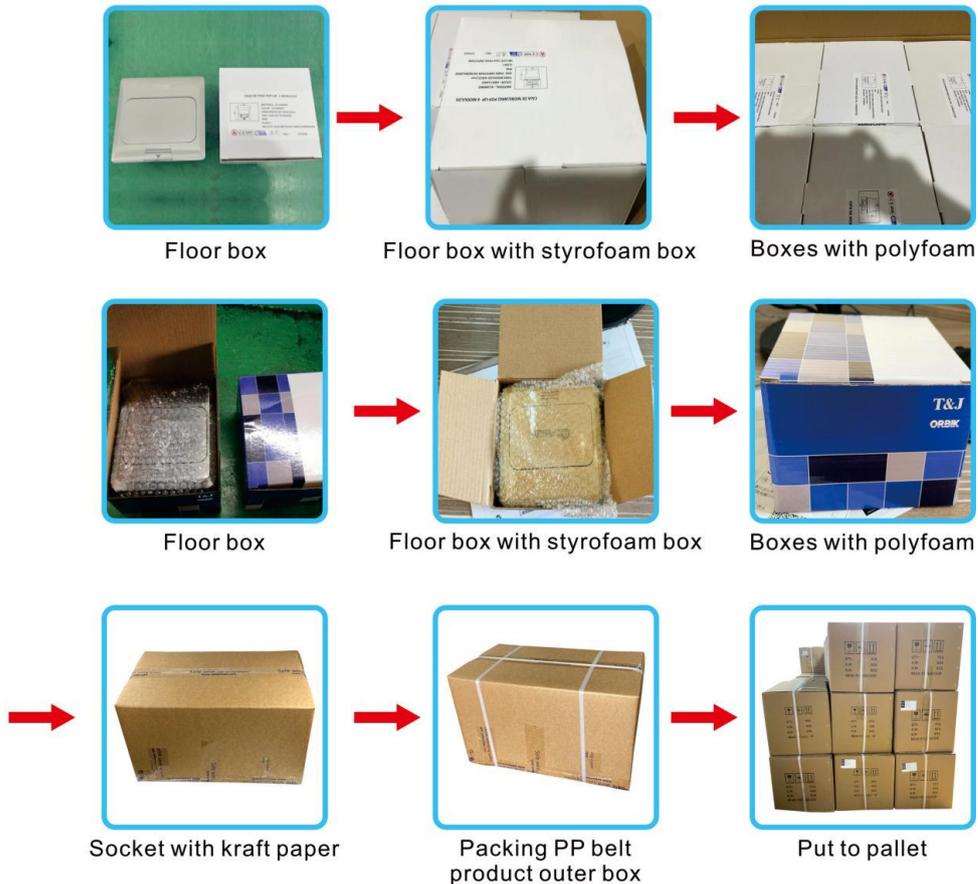

**Installation Guide** (The exact products should be subject to confirmation by seller)

Hold the lid down with your hand, Pull the push button as the direction, Panel pop up.

- 1.Remove panel from the bottom box along with the electrical modules.
- 2.Fix the flooring with spare screws on bottom box and place it in embedded hole.
- 3.The flooring surface shall be at least level with the ground or 20mm below the ground.
- 4.Remove lid surface ,Insert the 10--12mm lead head into the terminal of floor box.
- 5.Fix the panel to the bottom box with screws.

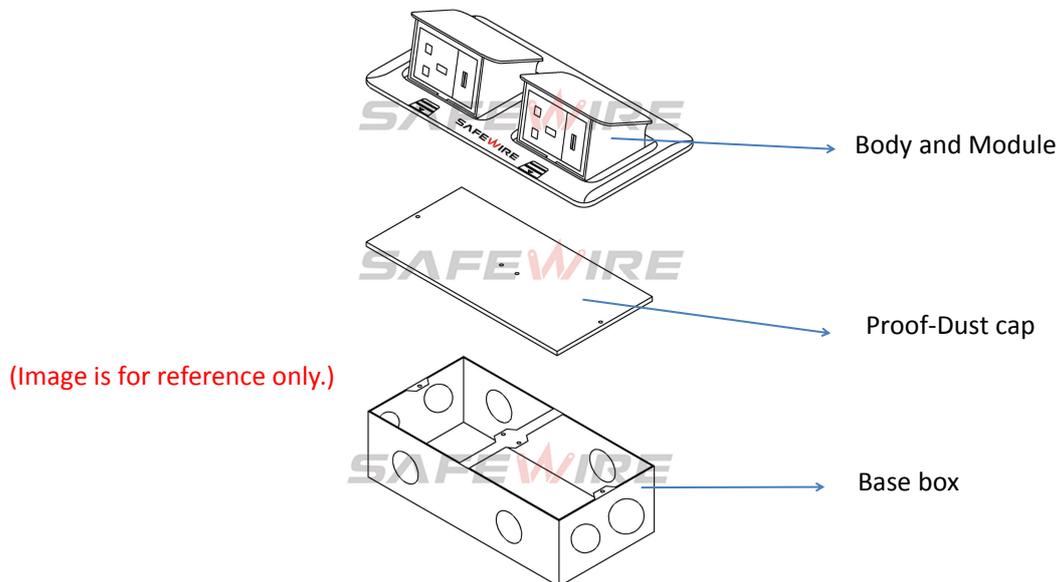

**Attentions:**

- 1.Dispose of trash in bottom box and prevent dirt and debris from entering inside.
- 2.The sealing ring is closely attached to the smooth surface to prevent water leakage.
- 3.Prevent from alkaline corrosion and humidity.
- 4.When installing, pay attention to the opening direction,the length of the conductor to the bottom box shall not exceed 10cm,Set aside at least 200mm of cable.
- 5.When installing and wiring,Product should avoid direct contact with corrosive liquid, gas (strong acid, strong alkali, paint).

**Safety Warning:**

- 1.This is a class I product and must be earthed
- 2.This product must be installed/wired by a qualified electrician
- 3.For indoor use only.
- 4.For concrete floor.